

proxSafe[®] racx

We manage your valuables

proxSafe is the first choice wherever keys or assets have to be managed automatically.

With proxSafe systems your keys are safely stored and will only be issued to authorized persons. Users and keyTags are identified contactlessly and therefore quickly and reliably. All transactions are recorded automatically.

proxSafe racx - Smart and Versatile

proxSafe racx is a modular system for safely storing keys and valuables. The various modules (pictured at right - description below) are assembled into a robust steel housing.

Key Management Module (mini)

Eight keyTags containing keys are safely stored behind an automatic closing steel shutter.

Laptop Module (boxx)

One automatically operated locker for laptop computers or similar devices and even documents. The boxx module is equipped with an automatic closing steel shutter. The contents are monitored by a proxSafe keyTag.

Drawer Module (loxx)

Each module consists of either two or four drawers. This module can store items such as car keys, cameras, mobile phones as well as weapons and ammunition. The contents of the drawer are monitored by a keyTag.

keyPanels

proxSafe racx systems can also be equipped with keyPanels (please refer to proxSafe flexx documentation).

Housings


For proxSafe racx modules there are steel housings of various sizes available. Installation and emergency release can be accessed using the service drawer with safety lock. Optionally the housings can be equipped with a front door.

Reliable and Maintenance-free

proxSafe racx systems are designed for rugged operation. As there is no electrical contact on the keyTag, dirt and corrosion will not affect the functionality which results in a high grade of reliability and no need for maintenance.

Fail-safe Opening

The drawers of the proxSafe racx system are not fully released after an electronic command but will open only after a user has touched the door. Thus unintended opening of the drawers can be avoided in case no user is present.

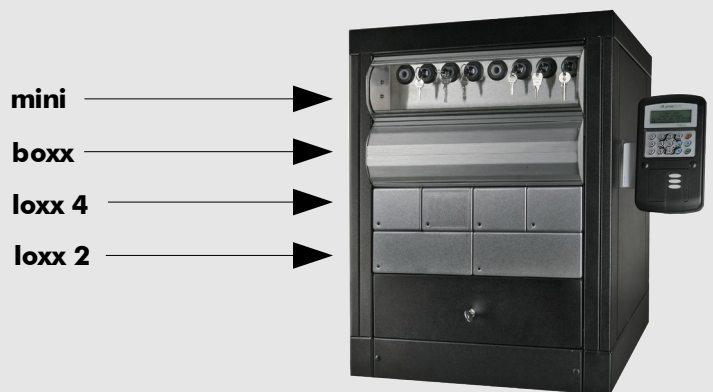

Technical Data

Housing dimensions (mm, inches)

18 U:	1120 x 560 x 550 (44.1 x 22.0 x 21.6)
36 U:	1920 x 560 x 550 (75.6 x 22.0 x 21.5)
Material:	sheet steel St 12.03, powder-coated, RAL 9011

Power Supply: 90-250 V/DC

Current

Consumption: 2300 mAh (with buffer battery)

Module loxx 2/loxx 4 (2/4 drawers)

Inside dims.(mm, in.):	180/90 x 65 x 165 (7.1/3.4 x 2.6 x 6.5)
Installation dimensions:	2 U
Material:	sheet steel St 12.03, front stainless steel
Weight:	approx. 24 kg (52.9 lbs)

Module mini 8 (8 key slots)

Installation dimensions:	3 U
Material:	stainless steel
Weight:	approx. 10 kg (22.0 lbs)

Module boxx (automatic locker)

Inside dimensions (mm):	320 x 100 x 340 (12.6 x 3.9 x 13.4)
Installation dimensions:	3 U
Material:	stainless steel
Weight:	approx. 8,5 kg (18.7 lbs)

Blind plates

Installation dimensions:	1U, 2 U and 3 U
Material:	stainless steel